
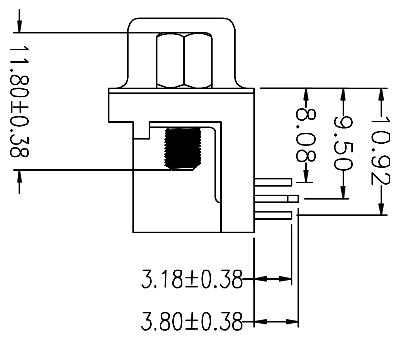
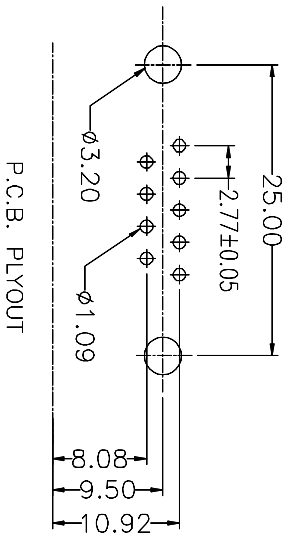
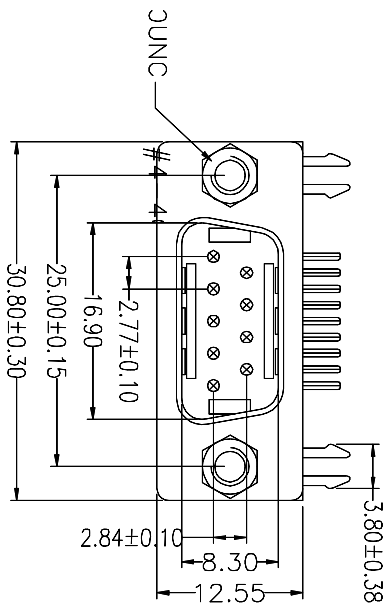


客户确认	
日期	

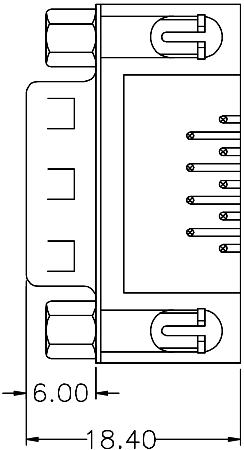

一、 MATERIAL:

1. Insulator: PBT+30%Glass Fiber (UL94V-0)
2. Contact: Brass
3. Contact Plated: Gold Flash over Tin Or Glod Plated Or Tin Plated
4. Shell: Steel, Nickel Plated

二、 SPECIFICATION:

1. Current Rating: 5 AMPS
2. Insulation Resistance: 5000M Ω MIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature: -55° C~+105° C.

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE:	CLIENT P/N	UNIT	SCALE	REV.
CHECKED:	DATE:	DMR-9P 公头 叉锁 半金 黑胶	G4190931	mm	Free	⊕
DRAWN:	DATE:	深圳市鑫鹏博电子有限公司				∇
YRR	2017-03-25	SHENZHEN XINPENGBO ELECTRONICS CO. LTD				A
		FILE NO.	XPB03570011			